

TECHNICAL DATA

Arenaflex ELEVATION

OLYMPIA

Building height: 75-145mm

Board: 21 x 215 x 2200mm

Format: 3-strip

CE



Weight Load



Floor Heating




Uneven Sub-Floor



Variable Heights

Education


Arena

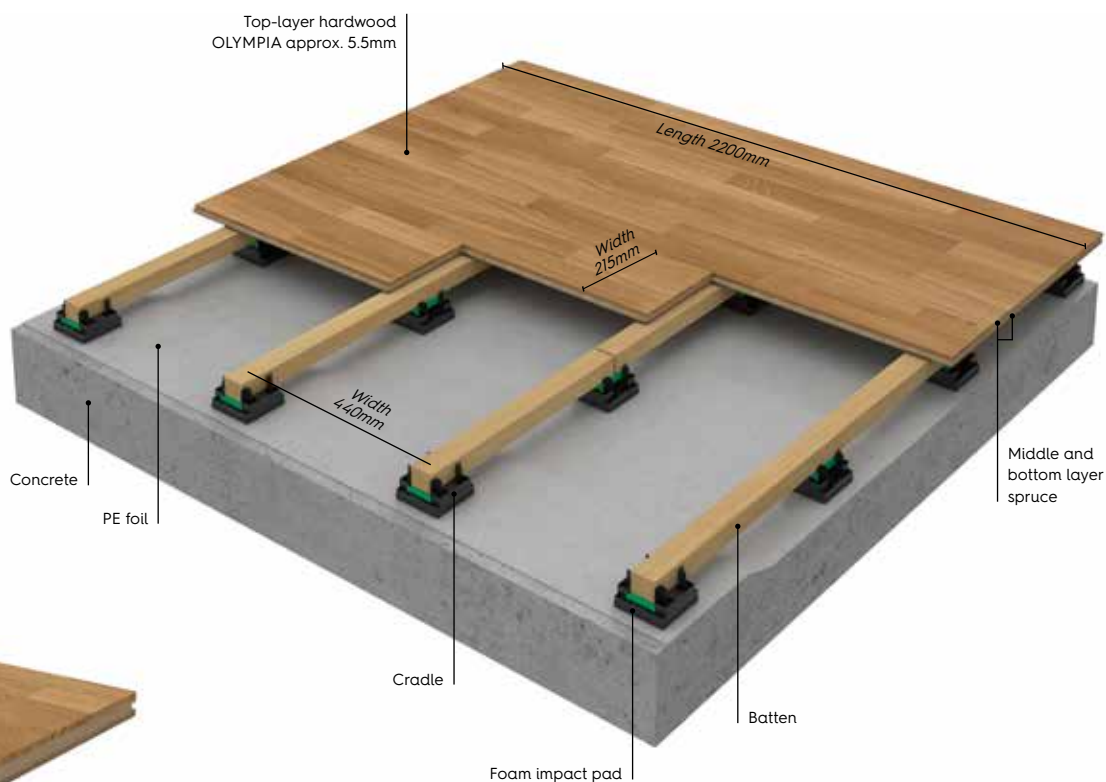

Performance according to EN14904	Shock absorption		Deformation		Friction	Ball bounce	Rolling load
	TYPE 3: ≥ 40% ≤ 55%	TYPE 4: ≥ 55% ≤ 75%	TYPE 3: ≥ 1.8mm ≤ 3.5mm	TYPE 4: ≥ 2.3mm ≤ 5.0mm			
Arenaflex Elevation	OLYMPIA	66%		3.4mm	88	91%	OK




3-strip



Tongue & groove

Wood species / Grading

Package overview

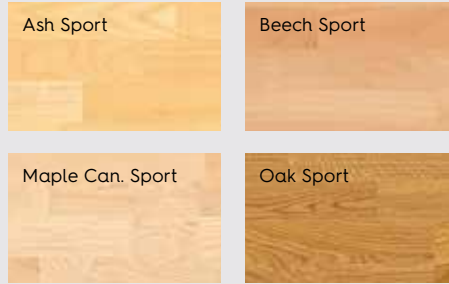

Pack size: 4 boards = 1.89 m² (21 kg)
 Pallet size: 50 packs = 94.50 m² (1050 kg)

Batten Centres at 440mm
 Batten Calculation = 2.52 lm/m² of floor

Cradle Calculation:
 Batten 36mm = Cradle Centre 450mm = 5.6 Cradles/m²
 Batten 48mm = Cradle Centre 600mm = 4.2 Cradles/m²

Arenaflex Olympia Construction Details (from the top to the edge of concrete/subfloor)		Height									
Arenaflex Olympia board • Hardwood top-layer 5.5mm • Middle layer and bottom layer spruce	Arenaflex board size: 21 x 215 x 2200mm	21	21	21	21	21	21	21	21	21	21
Batten , softwood Batten Centres at 440mm Batten Calculation = 2.52 lm/m ² of floor	Batten dimension: 36 x 45 x 1800mm	36	36	36	36						
	Batten dimension: 48 x 45 x 1800mm					48	48	48	48	48	
Packers (Maximum of 14mm per cradle)	Thickness: 2mm and 6mm										14
Cradle Polypropylene Flooring support with a 12mm resilient foam pad built in	E1 - Cradle 90 x 90 x 18mm	18					18				
	E1 - Cradle 90 x 90 x 32mm		32					32			
	E2 - Cradle 90 x 90 x 47mm			47					47		
	E2 - Cradle 90 x 90 x 62mm				62					62	62
PE foil (ordered separately)	Special requirement for new buildings: 2 layers of 0.2mm. It is not a moisture barrier, but gives to the floor an extra protection.	0.4mm									
Minimum construction height		75	89	104	119	87	101	116	131	145	

MAINTENANCE

We recommend starting a regular system of maintenance from day one. The amount of maintenance your floor requires will depend on how you use and treat it. For more information: boensport.com

ENVIRONMENT

BOEN Sport flooring is a product of natural materials. Respect for nature is reflected in our processing and management of raw materials. BOEN constantly seeks methods for processing the raw materials in the most gentle and sustainable manner possible.

FSC™ (Forest Stewardship Council) is a global non-profit organization, which promotes worldwide environmentally appropriate, socially beneficial, and economically viable management of the world's forests.

FSC™-certified products are controlled along the whole supply chain in order to separate it from non-certified wood. They are made from wood sourced from responsibly managed forests and other controlled sources.

The FSC™-trademark ensures that the wood has been harvested in a responsible way for animals, people and the environment. Buying such products helps to save our forests. More information on: www.fsc.org.

Read more on boensport.com

